



# Ambrosia

## Ciszak Dalmás

**marset**

Its design stems from a tubular structure with gentle lines that attaches to the ceiling, allowing the light to descend and gently illuminate any type of project. It is this diffuse light that fills the space, adding beauty.

Its linear and unique design, a nearly flat segment of light, was made modular and asymmetric to create a soft and surprising lighting system.



Ambrosia 120


| Code            | Finish      | Electrical Rating | Luminaire | CCT   | CRI   |
|-----------------|-------------|-------------------|-----------|-------|-------|
| A704-101-15-22K | ● Matt Gold | 24Vdc 19.2W       | 1885lm    | 2200K | CRI90 |
| A704-101-15-27K | ● Matt Gold | 24Vdc 19.2W       | 1891lm    | 2700K | CRI90 |
| A704-101-15-30K | ● Matt Gold | 24Vdc 19.2W       | 1927lm    | 3000K | CRI90 |
| A704-101-16-22K | ● Black     | 24Vdc 19.2W       | 1885lm    | 2200K | CRI90 |
| A704-101-16-27K | ● Black     | 24Vdc 19.2W       | 1891lm    | 2700K | CRI90 |
| A704-101-16-30K | ● Black     | 24Vdc 19.2W       | 1927lm    | 3000K | CRI90 |

Dimmable: Based on specified driver  
Integrated dimmer: No  
Dimming protocols: Based on specified driver

Materials  
Structure: Aluminum  
Diffuser: Methacrylate  
Canopy: Aluminum / Steel

Suitable for Damp Locations


LED included



“(1) The height can be increased by means of the 15.7 or 23.6 ” poles (max. 3 units.) They can be combined.”

Ambrosia 180

| Code            | Finish                          | Electrical Rating | Luminaire | CCT   | CRI   |
|-----------------|---------------------------------|-------------------|-----------|-------|-------|
| A704-102-15-22K | <div><div></div>Matt Gold</div> | 24Vdc 28.8W       | 2823lm    | 2200K | CRI90 |
| A704-102-15-27K | <div><div></div>Matt Gold</div> | 24Vdc 28.8W       | 2833lm    | 2700K | CRI90 |
| A704-102-15-30K | <div><div></div>Matt Gold</div> | 24Vdc 28.8W       | 2886lm    | 3000K | CRI90 |
| A704-102-16-22K | <div><div></div>Black</div>     | 24Vdc 28.8W       | 2823lm    | 2200K | CRI90 |
| A704-102-16-27K | <div><div></div>Black</div>     | 24Vdc 28.8W       | 2833lm    | 2700K | CRI90 |
| A704-102-16-30K | <div><div></div>Black</div>     | 24Vdc 28.8W       | 2886lm    | 3000K | CRI90 |

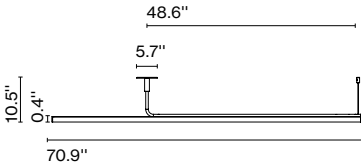


Dimmable: Based on specified driver  
Integrated dimmer: No  
Dimming protocols: Based on specified driver

Materials  
Structure: Aluminum  
Diffuser: Methacrylate  
Canopy: Aluminum / Steel


Suitable for Damp locations

LED included



Ambrosia 210

| Code            | Finish                          | Electrical Rating | Luminaire | CCT   | CRI   |
|-----------------|---------------------------------|-------------------|-----------|-------|-------|
| A704-103-15-22K | <div><div></div>Matt Gold</div> | 24Vdc 28.8W       | 2802lm    | 2200K | CRI90 |
| A704-103-15-27K | <div><div></div>Matt Gold</div> | 24Vdc 28.8W       | 2812lm    | 2700K | CRI90 |
| A704-103-15-30K | <div><div></div>Matt Gold</div> | 24Vdc 28.8W       | 2865lm    | 3000K | CRI90 |
| A704-103-16-22K | <div><div></div>Black</div>     | 24Vdc 28.8W       | 2802lm    | 2200K | CRI90 |
| A704-103-16-27K | <div><div></div>Black</div>     | 24Vdc 28.8W       | 2812lm    | 2700K | CRI90 |
| A704-103-16-30K | <div><div></div>Black</div>     | 24Vdc 28.8W       | 2865lm    | 3000K | CRI90 |

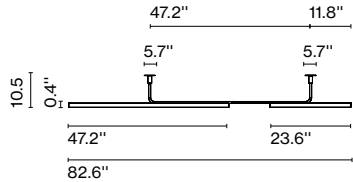


Dimmable: Based on specified driver  
Integrated dimmer: No  
Dimming protocols: Based on specified driver

Materials  
Structure: Aluminum  
Diffuser: Methacrylate  
Canopy: Aluminum / Steel

Suitable for Damp locations


LED included



“(1) The height can be increased by means of the 15.7 or 23.6 “ poles (max. 3 units.) They can be combined.”

Ambrosia 315

| Code            | Finish                          | Electrical Rating | Luminaire | CCT   | CRI   |
|-----------------|---------------------------------|-------------------|-----------|-------|-------|
| A704-104-15-22K | <div><div></div>Matt Gold</div> | 24Vdc 43.2W       | 4220lm    | 2200K | CRI90 |
| A704-104-15-27K | <div><div></div>Matt Gold</div> | 24Vdc 43.2W       | 4235lm    | 2700K | CRI90 |
| A704-104-15-30K | <div><div></div>Matt Gold</div> | 24Vdc 43.2W       | 4314lm    | 3000K | CRI90 |
| A704-104-16-22K | <div><div></div>Black</div>     | 24Vdc 43.2W       | 4220lm    | 2200K | CRI90 |
| A704-104-16-27K | <div><div></div>Black</div>     | 24Vdc 43.2W       | 4235lm    | 2700K | CRI90 |
| A704-104-16-30K | <div><div></div>Black</div>     | 24Vdc 43.2W       | 4314lm    | 3000K | CRI90 |

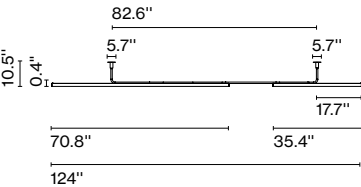


Dimmable: Based on specified driver  
Integrated dimmer: No  
Dimming protocols: Based on specified driver

Materials  
Structure: Aluminum  
Diffuser: Methacrylate  
Canopy: Aluminum / Steel

Suitable for Damp locations

LED included



“(1) The height can be increased by means of the 15.7 or 23.6 “ poles (max. 3 units.) They can be combined.”



Accessories guide

The Ambrosia offers numerous powering options, as well as extension poles to increase the fixture drop. If chosen, the items below should be selected at time of specification.

The Ambrosia 120 and 180 have a rigid stem on one end, so can accommodate a maximum of three height extension poles of either size. The Ambrosia 210 and 315 have rigid stems on both ends, so can accommodate a maximum of six height extension poles of either size (three per end). Default drop length for all Ambrosia fixtures, without extension poles, is 10.5 inches. Maximum drop length, utilizing three 23.6-inch poles per end, is 81.3 inches.

Power supplies for this fixture are sold separately. The all-in-one solution for power is the Canopy (A666-213-1\*), which contains the 60W 0-10V driver and mounts over a junction box.

For recessed or remote-driver installation, select only the Power Supply (968-230), and Outlet Box Cover Plate (A666-219-1\*).

Alternately, the fixture can be powered by a UL/ETL-certified 24V power supply from a third-party supplier.

Height extension pole 16

| Code        | Finish      |
|-------------|-------------|
| A704-005-15 | ● Matt Gold |
| A704-005-16 | ● Black     |


Materials  
Structure: Metal



Height extension pole 24

| Code        | Finish      |
|-------------|-------------|
| A704-006-15 | ● Matt Gold |
| A704-006-16 | ● Black     |

Materials  
Structure: Metal




Canopy Ambrosia 60W

| Code        | Finish                | Dimming |
|-------------|-----------------------|---------|
| A666-213-15 | ● Matt Gold - 60W 24V | 0-10V   |
| A666-213-16 | ● Black - 60W 24V     | 0-10V   |

Materials  
Structure: Metal


Dimmable: Yes  
Integrated dimmer: No  
Dimming protocols: 0-10V  
INPUT: 120-277 VAC 50/60Hz  
OUTPUT: CV 24V DC 60W max.



| Code        | Finish                | Dimming             |
|-------------|-----------------------|---------------------|
| A666-254-15 | ● Matt Gold - 60W 24V | ELV / Triac / 0-10V |
| A666-254-16 | ● Black - 60W 24V     | ELV / Triac / 0-10V |

Materials  
Structure: Metal


Dimmable: Yes  
Integrated dimmer: No  
Dimming protocols: 0-10V  
INPUT: 120-277 VAC 50/60Hz  
OUTPUT: CV 24V DC 60W max.



Outlet Box Cover Plate

| Code        | Finish      |
|-------------|-------------|
| A666-219-15 | ● Matt Gold |
| A666-219-16 | ● Black     |


Product type: Accessory  
Product notes: Ceiling cover plate for 4" octagonal junction box.



Power supply - Dimmable


Code 968-230 Description Power supply 60W - 24VDC Dimming 0-10V

Product type: CLASS 2 Power supply INPUT: 120 VAC 50/60Hz OUTPUT: CV 24V DC 60W max.




Code 968-233 Description Power supply 100W - 24VDC Dimming 0-10V

Product type: CLASS 2 Power supply INPUT: 120 VAC 50/60Hz OUTPUT: CV 24V DC 100W max.



Code A968-333 Description Power supply 60W - 24VDC Dimming ELV

Product type: CLASS 2 Power supply INPUT: 120 VAC 50/60Hz OUTPUT: CV 24V DC 60W max.



The installation and location of the remote LED driver **and any required enclosure** must be in accordance with **applicable codes and laws** and will be the exclusive responsibility of the installation company. **Marset does not provide remote driver enclosures.**

**⚠ WARNING.** California Proposition 65 Warning for California Consumers. This product can expose you to chemicals including wood dust and lead which are known to the State of California to cause cancer or birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

**Watch the video** [marsetusa@marset.com](mailto:marsetusa@marset.com)  
[www.marset.com](http://www.marset.com)

**Download** Photometric data file (LDT or IES)  
2D, 3D, Photometric Data  
Assembly instructions

Collection

